



High speed door fabric PVC resin and polyester fabric layer laminated, or by scraping process production, is a medium and heavy duty tarp, weight from 800gsm–2000gsm. With high strength, waterproof, durable, tear resistance, folding resistance and other characteristics. It has high intensity and is common in warehouses, unloading docks, factories, logistics, business centers and other fields, which isolates bad weather and dust, rapidly isolate space, and reduce energy waste, with excellent sealing effect.

Factory wholesale

WEB: www.gstarp.com


Jiaxing Green Shield New Materials Co., Ltd




Professional sales team, over 15 years experience in producing Color Mesh Fabric, Over 10 years OEM&ODM finished product experience, we are a factory produces pvc tarpulin in Haining, The greatest feature of our Color Mesh Fabric is stable and durable quality.

| Welcome to | OURFACTORY



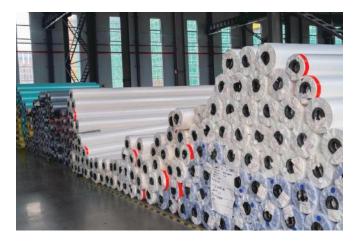





You can get the reasonable price with best quality here






Properties of High speed door fabric:





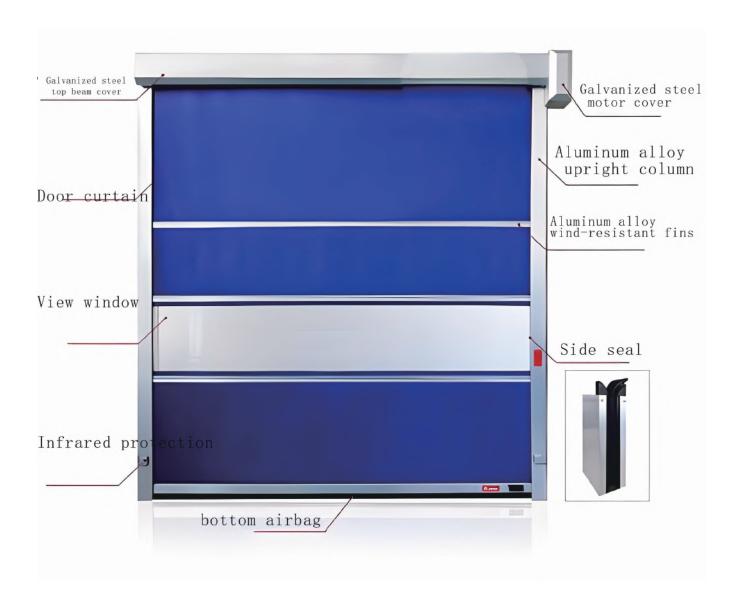

Applications:

Warehouse, logistics center, food factory, workshop door, cold storage door, temperature controlled warehouse door, loading and unloading dock, repair shop door, airport door, station, parking lot entrance, laboratory door, clean room door,

Choosing the Right Fabric for High-Speed Doors Here are a few factors to consider when choosing a High Speed Door Fabric:

High quality PVC fabric has strong impact resistance, weather resistance, UV resistance, wear resistance, tear resistance, and high strength, and can cope with the wear caused by frequent use, with good durability. It can also be used normally in direct sunlight.

PVC fabric is 100% waterproof and can be used in wet and rain environments to prevent moisture penetration and block humid air.

The use temperature range of PVC fabric is cold—hot 40–70° C, which ensures that the High Speed Door can be used normally in high temperature or extremely cold environment.

High Speed Door fabric has good flexibility, can be used at high frequency, with fast opening and closing as well as high work efficiency.



			340gsm	550gsm	610gsm	650gsm	750gsm	1050gsm
Properties	Units	Test method	Average value	Average value				
Base Thread Density	Denier	DIN53350	500D*840D	1000D*1000D	500D*840D	1000D*1000D	1000D*1000D Panama	1000D*1000D
Base Fabric Density	Thread/inch	DIN53351	30*19	18*18	30*19	20*20	30*30	30*30 Panama
Finished Fabric Weight	Gram/m2	DIN53352	340	550	340	650	750	1050
Base Fabric Weight	Gram/m2	DIN53352	135	157	135	175	265	265
Thickness-finished product	um	DIN53352	32	42	32	52	65	80
Break Strength Warp	N/5cm	GB/T1040	2100	2000	2100	2500	4000	4200
Break Strength Weft	N/5cm	GB/T1040	2200	1800	2200	2200	3800	4000
Tear Strength Warp	N/5cm	DIN 53363	150	220	150	280	800	600
Tear Strength Weft	N/5cm	DIN 53363	200	200	200	250	700	550
Adhension	N/5cm	DIN 53357	100	120	100	90	120	120
Temperature range	${\mathbb C}$	DIN 53368	-30~+70	_30~+70	-30~+70	_30~+70	_30~+70	_30~+70
Fire Retardant		Self- extinguishing	M1		M1		ONE SIDE COATED	Both sides lacquring

Colorful













WEB: www.gstarp.com



UV risistant:

The GSTRP PVC tarps are all UV-protected, which is a very important feature for it, by taking into account the surface and coating, it consists of a 6-layer barrier against UV rays.

Heat insulation:

The PVC coated fabic is formulated so that the coating is flame retardant, an extra layer of security is added to protect against subultraviolet rays, and has good insulation against heat sources.

Durability:

The PVC coated fabric is produced by imported equipment, the product structure is advanced, has a solid surface, has a strong resistance to prevent tear, this is one of the biggest features of our products, the quality is very stable, with long life cycle, there is a very excellent durability.

Cold resistance:

The GSTRP PVC tarpaulin has good cold resistance, the lowest can be -60 degrees, it is leading in the industry, we have special cold resistance test instrument.



Jiaxing Green Shield New Materials Co., Ltd

Mobile: 0086 13625863196 WhatsApp: 0086 13625863196

Add: No.365 West Qianjiang Road, Haining, Zhejiang, China

e-mail: bill@gstarp.com