



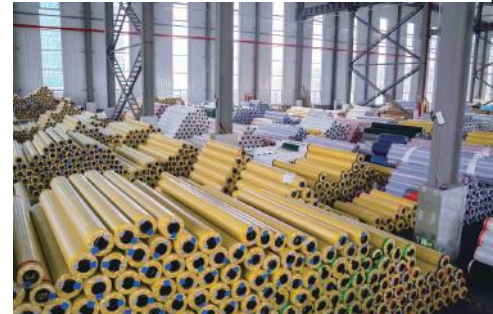

Width
3.2m

Welcome to
OURFACTORY

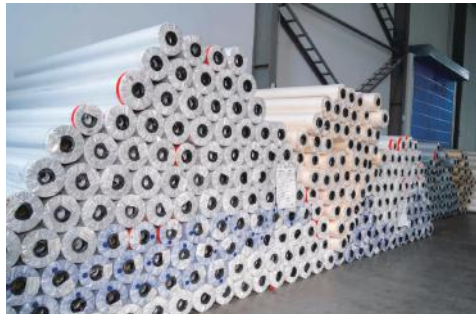

You can get the reasonable price with best quality here.

Professional sales team, over 15 years experience in producing PVC Space Divider Screen Fabric, Over 10 years OEM&ODM finished product experience, we are a factory produces pvc tarpulin in Haining, The greatest feature of our PVC Space Divider Screen Fabric is stable and durable quality.



Fire Prevention



corrosion preventive



No odor



printable

1

Printable :

The fabric has the feature of printable, making it widely used in advertising industry, it can print LOGO according to customer's requirements.

2

Color fastness:

Imported pigments are added for sg fabric in the production process, with anti-UV additives, it forms a stable polymer compounds, can maintain this color, and will not fade in the direct light of the eye and hot and humid environment for a long time.

3

Safety:

Corrosion resistance, no harmful substances, very small deformation rate, anti-static, flame retardant heat insulation, very safe.

4

Aging preventing:

PVC fabric production process is advanced, FILE and and basically formed a stable structure, stable polymer compounds making it not prone to be eroded, the surface of the special treatment, there is a very good anti-aging effect, can be used for 10-15 years.

5

Environmental Adaptability :

We have exported a lot of products to Southeast Asia, Middle East, North America and other regions of the customer, have good reputations, also the product environmental adaptability is very good, its work temperature is from -40-70.

Properties	Units	Test method	Average value
Base Thread Density	Denier	DIN53350	D500*500
Base Fabric Density	Thread/inch	DIN53351	18*16
Finished Fabric Weight	Gram/m2	DIN53352	580
Base Fabric Weight	Gram/m2	DIN53352	95
Thickness – finished product	um	DIN53352	54
Break Strength Warp	N/5cm	GB/T1040	1500
Break Strength Weft	N/5cm	GB/T1040	1200
Tear Strength Warp	N/5cm	DIN 53363	250
Tear Strength Weft	N/5cm	DIN 53363	200
Adhension	N/5cm	DIN 53357	50
Temperature range	℃	DIN 53368	-30~+70
Maximum Width	3.45M	Self-extinguishing	



PVC Space Divider Screen Fabric – specifications



Properties	Units	Test method	320gsm	410gsm	450gsm	750gsm
			Average value	Average value	Average value	Average value
Base Thread Density	Denier	DIN53350	500D*500D	1000D*1000D	500D*500D	1000D*1000D
Base Fabric Density	Thread/inch	DIN53351	9*9	18*18	18*16	23*23
Finished Fabric Weight	Gram/m ²	DIN53352	320	400	580	750
Base Fabric Weight	Gram/m ²	DIN53352	45	154	95	200
Thickness – finished product	um	DIN53352	31	31	54	60
Break Strength Warp	N/5cm	GB/T1040	800	2500	1500	3000
Break Strength Weft	N/5cm	GB/T1040	750	2000	1200	2800
Tear Strength Warp	N/5cm	DIN 53363	150	250	250	300
Tear Strength Weft	N/5cm	DIN 53363	120	220	200	270
Adhension	N/5cm	DIN 53357	30	100	50	120
Temperature range	°C	DIN 53368	-30~+70°C	-40~+70°C	-30~+70°C	-30~+70°C
Flame retardancy		Self-extinguishing				Both sides lacquering



Jiaxing Green Shield New Materials Co., Ltd

Mobile: 0086 13625863196

WhatsApp: 0086 13625863196

Add : No.365 West Qianjiang Road, Haining, Zhejiang, China

e-mail : bill@gstarp.com