


## 398 awning tarps Available Worldwide

Awning tarps are also called PVC Awning Fabric or PVC tarpaulin canvas, PVC tarpaulin canopy, sunshade Fabric, made by High strength polyester fabric coated with PVC on both sides.

It's mainly used for porch and window sunshade, and outdoor sunshade, as well as the production of movable awnings, sliding sheds, also widely used in commercial activities, PVC SunProtect tarpaulin 100% is waterproof, abrasion–resistant, flame retardant, UV resistance, anti–tear, has good tensile properties, especially durable, to protect from the sunlight, wind and rain and other hostile weather, it can last for 5 years with proper use. With soft texture and colorful colors, it can make a variety of beautiful shapes, such as sun umbrellas, various umbrellas, etc., which is very suitable for outdoor application.

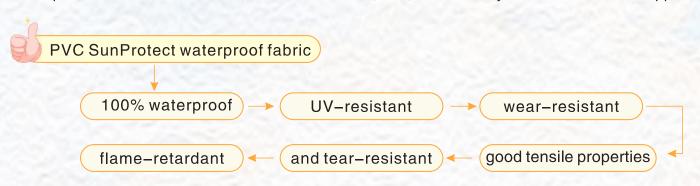

## 398 awning tarps Available Worldwide



GSTRP is a professional factory produces Awning tarps with over 15 years of experience. Our products are sold to more than 150 countries around the world. We can produce PVC Awning tarps with weights ranging from 230g to 1050g, with a maximum width of 5.1 meters. We can produce any color according to RAL, PANTONE, or sample., Width and length can also be made according to customer requirements.



Professional sales team, Over 10years OEM&ODM finished product experience, Gemeny production lines, Automatic computer colour meching system, Advanced inspection process, Imported pvc resin, Can deliver what exactly client need.













10 years of finished product experience



Automatic color matching system



Advanced inspection procedures



### Features of PVC Awning tarps



2

#### Opaue:

By adding chemical additives, we can make it completely opaque.



#### No heavy metals:

Complying with EU standards and strictly controlling raw materials and production process, fabric has no heavy metals and fully compliant with the standards.








#### Softness & excellent feeling:

By controlling the density of polyester fiber cloth and the thickness of the upper and lower coatings, together with the chemical additives, we make the softness that meets the customer's requirements. With the professional surface treatment process, fabric feels excellent to the touch.



#### **Super Tear Resistance:**

GSTRP UES the high mesh density polyester fabrics and compilation fabrics, via the production process of coated or knife coated, add a variety of additives, including but not limited to stabilizers, plasticizers, fire retardants, etc., so that the tarpaulin has a very strong tear resistance, tear strength can reach 400N / square meter.



6

The key to tensile strength lies in the choice of polyester fabric and woven fabric, while the density and diameter of the warp and weft threads are very important. Our products have good tensile strength, which is an important indicator of product quality, and the tensile strength can reach 6000N/square meter.



# 398 SunProtect tarpaulin popular tyes and specification

			340gsm	380gsm	650gsm	680gsm	750gsm
Properties	Units	Test method	Average value	Average value	Average value	Average value	Average value
Base Thread Density	Denier	DIN53350	500D*840D	840D*840D	1000D*1000D	1000D*1000D Low-wick	1000D*1000D
Base Fabric Density	Thread/inch	DIN53351	30*19	18*18	20*20	20*20	23*23
Finished Fabric Weight	Gram/m <sup>2</sup>	DIN53352	340	380	650	680	750
Base Fabric Weight	Gram/m <sup>2</sup>	DIN53352	135	150	175	175	200
Thickness – finished product	um	DIN53352	32	52	52	52	60
Break Strength Warp	N/5cm	GB/T1040	2100	1850	2500	2500	3000
Break Strength Weft	N/5cm	GB/T1040	2200	1600	2200	2200	2800
Tear Strength Warp	N/5cm	DIN 53363	150	220	280	280	300
Tear Strength Weft	N/5cm	DIN 53363	200	180	250	250	270
Adhension	N/5cm	DIN 53357	100	100	90	90	120
Temperature range	$^{\circ}$	DIN 53368	-30~+70℃	-30~+70℃	-30~+70℃	-30~+70℃	-30~+70°C
Fire Retardant		Self- extinguishing	M1			Both sides lacquring	Both sides lacquring

## 398 awning tarps Available Worldwide





#### colorful



Jiaxing Green Shield New Materials Co., Ltd

Mobile: 0086 13625863196 WhatsApp: 0086 13625863196

Add: No.365 West Qianjiang Road, Haining, Zhejiang, China e-mail: bill@gstarp.com WEB: www.gstarp.com